



Polycom® SoundStation VTX1000™

The world's first wideband conference phone

Benefits

Acoustic Clarity Technology – Allows simultaneous natural conversation – the industry's best full-duplex

Unparalleled room coverage – Speak naturally from up to 20-feet from a microphone and be heard clearly on the far-end

Revolutionary voice quality – The world's first phone to deliver wideband voice over ordinary telephone lines; it's like going from black and white to colour TV!

Built-in investment protection – The world's first conference phone that allows you to download new software remotely through an ordinary telephone line to add new features and applications. Ask about our SharedCare Plus Program

Maximum configuration flexibility – Has independent input and output, bass/treble controls, and internal mic and speaker control for multiple uses and applications including external speakers

Easy to install/easy to use – Start conferencing in minutes!

Easy integration – With Polycom Vortex® installed room systems, Polycom VSX™ 7400 and VSX 8400 video conferencing solutions and Global Management System™




Revolutionary voice quality and clarity from up to 20 feet away.

The Polycom SoundStation VTX 1000 with Acoustic Clarity Technology is truly a leap in voice conferencing technology. It's the world's first conference phone that automatically adapts to each meeting environment, providing high fidelity voice clarity for all participants. With the SoundStation VTX 1000, conference call participants can speak at a normal, natural conversation level and be heard clearly from up to 20-feet away from the microphone – even in large conference rooms. And, when two SoundStation VTX 1000 conference phones connect on opposite ends of a call, the phones automatically connect in VTX™ Wideband mode, resulting in extraordinary fidelity. SoundStation VTX 1000 is the voice platform for the future. No wonder Polycom is the #1 choice in conference phones, worldwide.

The best-in-class choice for The Polycom Office™

With integrated video, voice, data, and Web capabilities, The Polycom Office is the only solution that offers any size business an easy way to connect, conference, and collaborate any way you want. The Polycom Office is our commitment to making distance communications as natural and interactive as being there. Work faster, smarter, and better with SoundStation VTX 1000 and The Polycom Office.

Wideband Audio

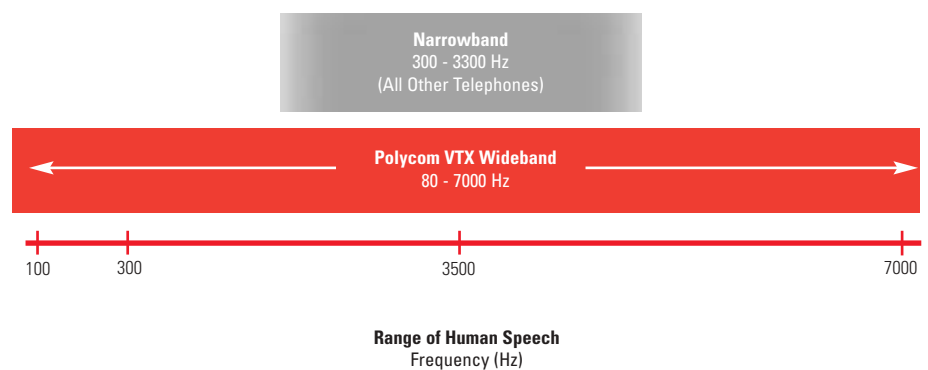

Polycom SoundStation VTX 1000 Specifications

Additional SoundStation VTX 1000 features/benefits

- Noise reduction technology automatically minimises PC, projector, and HVAC sounds
- Automatic mic selection – only one mic is on at a time to remove “in the well” sound
- Independent microphone, echo-cancelled channels that optimise to their individual environment for better sound
- Extension mics provide even greater room coverage for larger rooms
- Subwoofer for audio extension down to 80 Hz, which provides clearer, lifelike sound
- Selectable, downloadable ring tones

Console

Size (L x W x H)

- 36.8 x 31.1 x 6.4 cm
(14.5 x 12.25 x 2.5 in)

Weight

- 0.8 kg (1.75 lb.)

Power

- 22VDC nominal; supplied by interface module

Display

- High-resolution backlit graphical LCD

Caller ID

- Bellcore type 1 (requires a telephone company subscription for activation)

Keypad

- 12-key telephone keypad
- On-hook/off-hook, conference, mute, volume up/down keys, menu, navigation keys
- 3 content-dependent soft keys including redial, hold

Console Loudspeaker

- Frequency response: 300 Hz to 3.3 kHz in narrowband mode, 80 Hz to 7 kHz in wideband mode
- Volume: adjustable to 89 dB (peak) volume at 0.5 metres

Treble/Bass Controls

- Adjustment range: ± 6 dB

Console Microphones

- 3 cardioid microphones 80 Hz - 7 kHz

Console Interface

- RJ-45: proprietary P8 interface to interface module
- RJ-11: 32 Mbps serial link for future expansion
- 2 EX microphone connections

Sub-woofer

Size (L x W x H)

- 2.22 x 1.31 x 2.32 cm
(8.750 x 5.150 x 9.2125 in)

Weight

- 2.61 kg (5.75 lb.)

Miscellaneous

- Frequency response: 80 to 300 Hz in wideband mode
- Power: switchable 110/220 V, 50/60 Hz (100 V for Japan) includes country-specific AC cable

Interface module

Size

- 7.9 x 19.7 x 4.8 cm
(3.125 x 7.75 x 1.875 in)

Weight

- 0.34 kg (0.75 lbs)

Power

- 90 - 264 VAC, 50 - 60 Hz includes country-specific AC cable

Auxiliary audio

Input

- Style: phono jack
- Function: switchable between Polycom wireless mic/AUDIO IN/OFF
- Softkey configurable setup menus

Output

- Style: phono jack
 - Function: switchable between subwoofer/external PA/record out/OFF
 - Softkey configurable setup menus
- See user documentation for further specifications*

Telco Interface

- Network connection: 2-wire RJ-11 analogue PBX or PSTN interface
- Speech mode
 - Bandwidth 300 Hz to 3.3 kHz or 80 Hz to 7 kHz (point-to-point)
- Network requirements: compatible with standard PSTN and PBX networks, analogue or G.711 encoded
- Software download mode
 - Download protocol: V.34 compatible
 - Connection rates: to 33 Kbps, depending on line quality
 - Download server: Polycom download server

Extension Microphones

- 2 cardioid extension microphones (included), 80 Hz-7 kHz

Regulatory Compliance

- Safety
 - UL 1950
 - CSA C22.2, no. 950
 - EN6-950
 - IEC60950AS/NZS3260
- EMC
 - FCC (47 CFR Part 15) Class B
 - ICES-003 Class B
 - EN55022 Class B
 - CISPR 22 Class B
 - AS/NZS 3548 Class B
 - VCCI Class B
 - EN50224

Environmental Requirements

- Operating temperature: 40° - 104°F (5° - 40°C)
- Relative humidity: 20% - 85% (noncondensing)
- Storage temperature: -22° - 131°F (-30° - 55°C)

Recommended Room Conditions

- Reverberation time: <0.54 seconds
- Noise level: <48 dBa

Warranty

- 12 months

Part Number

- 2200-07300-001 (Console only)

EX microphones and subwoofer purchased separately

SoundStation VTX 1000 Ships With:

- Tabletop console with integrated display and keypad
- Power/network interface module
- User documentation (user guide, quick installation guide, registration card)
- Cables
 - 1 Power cable (console)
 - 6.4m (1 21-ft.) console cable
 - 2.1m (1 7-ft.) telco cable

Audio Enhancements

- Automatic Gain Control (AGC)
- Dynamic Noise Reduction
- Gated microphones with intelligent microphone



InterCall Conferencing Services: Building A, Trinity Court, Wokingham Road, Bracknell, Berkshire RG42 1PL. Tel:0800 073 0666 or +44 (0)1452 556 267, www.intercalleeurope.com

©2005 Polycom, Inc. All rights reserved.

Polycom, the Polycom logo, SoundStation, SoundStation Premier and Vortex are registered trademarks and VoiceStation, VSX, VTX, The Polycom Office, Global Management System, SoundStation VTX 1000 and the industrial design of SoundStation are trademarks of Polycom, Inc. in the U.S. and various countries. All other trademarks are the property of their respective companies. Specifications subject to change without notice.



Polycom EMEA Headquarters: 270 Bath Road, Slough, Berkshire SL1 4DX, United Kingdom, (T) +44 (0)1753 723000, (F) +44 (0)1753 723010

Polycom (France) Sarl: Tour Areva, 31st Floor, 1 place de la Coupole, 92084 la Defense, Paris, France, (T) +33 141 321 999, (F) +33 141 321 998

Polycom (Germany) GmbH: Am Söldnermoos 17, 85399 Hallbergmoos, Germany, (T) +49 (0)811-9994 - 100, (F) +49 (0)811-9994 - 200

Polycom Headquarters: 4750 Willow Road, Pleasanton, CA 94588 (T) 1.800.POLYCOM (765.9266) for North America only. For North America, Latin America and Caribbean (T) +1.925.924.6000, (F) +1.925.924.6100

Polycom Asia Pacific: Polycom Hong Kong Ltd., Rm 1101 MassMutual Tower, 38 Gloucester Road, Wanchai, Hong Kong, (T) +852.2861.3113, (F) +852.2866.8028